LUCASEY MOUNTING SYSTEMS

THIL200A

Adjustable Height Wall Plate Hook Mount for up to 32" Flat Panel Screens with up to 200mm Mounting Patterns

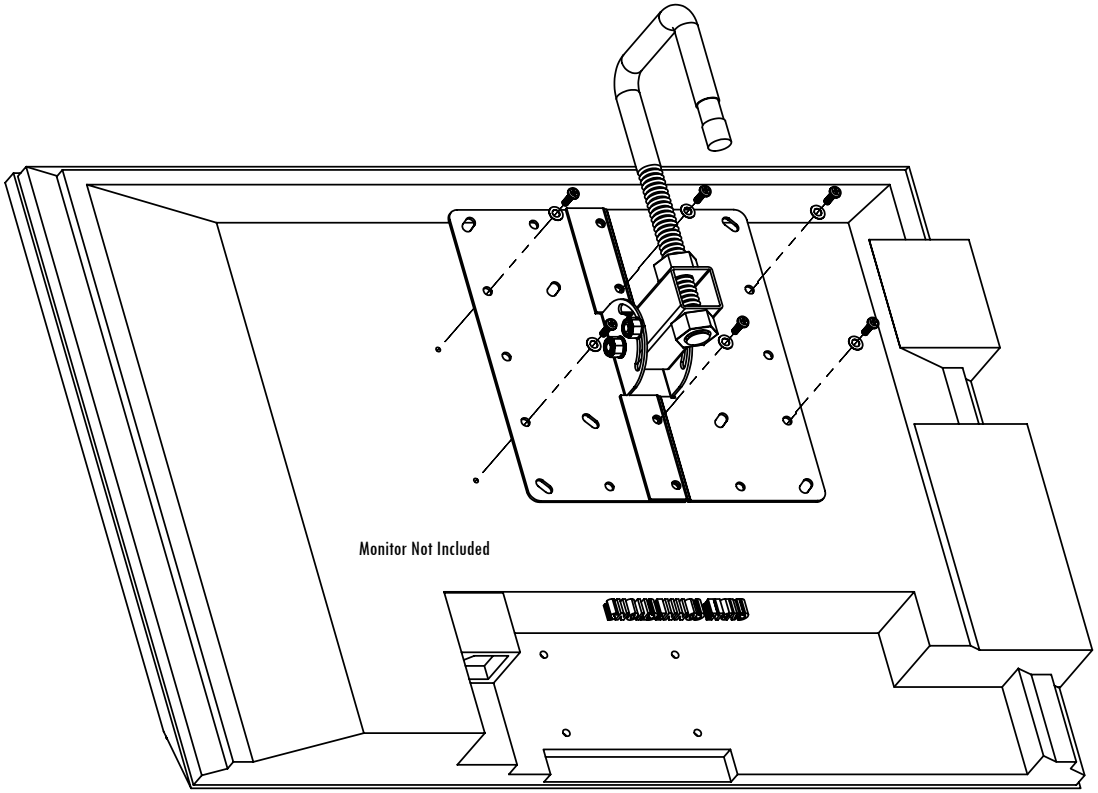

These instructions do not include installing the hook style wall plate

1. Attach the 200mm VESA Plate to the back of the monitor with screws that are appropriate for the threaded inserts on the monitor. An assortment of monitor attaching screws are provided for convenience.

2. Hook the mount with the monitor onto the wall plate. If available on the wall plate, secure the hook in place with the locking screw on the wall plate.

3. Adjust the viewing angle and tighten the 1/4-20 socket head screw to fix the monitor in the desired viewing angle.

4. If height adjustment is needed, loosen the top 5/8" Hex Nut, and adjust to the height desired. Tighten the bottom nut until the U-Hook with Square Tubing is tightly clamped between the two 5/8" Hex Nuts.

Contents

- 1 ... U-Hook with Square Tubing
- 2 ... 5/8" Hex Nuts for Height Adjustment
- 1 ... 200mm VESA plate
- 1 ... 5/16-18 x2" Button Socket Head Screw
- 2 ... 5/16" Bellville Washer
- 2 ... 5/16" Flat Washer
- 1 ... 5/16" Nylok Nut
- 1 ... 1/4-20 x2" Button Socket Head Screw
- 2 ... 1/4" Bellville Washer
- 2 ... 1/4" Flat Washer
- 1 ... 1/4-20 Nylok Nut

Monitor Attaching Screws

- 6 ... 4mm x 25mm Set Screws
- 6 ... 5mm x 30mm Set Screws
- 6 ... 6mm x 30mm Set Screws
- 6 ... 4mm x 12mm Phillips Screws
- 6 ... 5mm x 12mm Phillips Screws
- 6 ... 6mm x 12mm Phillips Screws
- 12 ... 4mm Hex Nuts
- 12 ... 5mm Hex Nuts
- 12 ... 6mm Hex Nuts
- 36 ... 5mm Flat Washers
- 18 ... 1/4" Flat Washers

Warning! Do not leave the 5/8" Hex Nuts for Height Adjustment loose. The THIL200A is shipped with these nuts tight. If the height is adjusted, the nuts need to be tightened again.

Protected under one or more of these U.S. Patent numbers: 3,291,432 3,559,942 3,724,798 DES.270,689 4,613,109 4,878,645 4,852,842 DES.309,562 4,973,023 5,169,114 5,255,884 5,310,152 5,522,576 5,621,614 Re.35,677
DES.398,834 5,826,384 5,941,492 5,964,068 6,060,661 6,102,398 6,158,704 6,454,116B1 6,761,276B2 6,806,425B1

©2008 Lucasey Manufacturing Corporation, Oakland, California